


NORDUC® PA 134

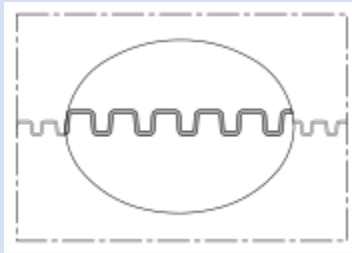

Corrugated plastic protection tube made of PA6; highly flexible and liquid tight

Applications

- cable protection: cable protection conduit, cable protection tube, cable protection hose, electric installation, switch cabinets, switch cabinet installation, cable harnessing/ cable assembly

Properties

- IP 68 to EN/ IEC 60529

- flame-retardant according to: UL94-HB

Temperature range

- -40 °F to 255 °F

Design

- NORDUC® design
- wall: high grade polyamide (PA)

Delivery variants

- further diameters and lengths available on request

| Nominal width connecting part (in) | I.D. (mm) | outer Ø (in) | Bending radius (middle of hose) (in) | Weight (lb/ft) | PU (ft) | Order No. |
|---------------------------------------|--------------|-----------------|--|-------------------|------------|---------------|
| slotted, black | | | | | | |
| 0.295 | 0.276 | 0.394 | 0.000 | 0.013 | 164.050 | 134-3010-9155 |
| 0.335 | 0.331 | 0.461 | 0.000 | 0.013 | 164.050 | 134-3012-9155 |
| 0.394 | 0.390 | 0.512 | 0.000 | 0.020 | 164.050 | 134-3013-9155 |
| 0.512 | 0.500 | 0.622 | 0.000 | 0.027 | 164.050 | 134-3016-9155 |
| 0.669 | 0.654 | 0.835 | 0.000 | 0.040 | 164.050 | 134-3021-9155 |
| 0.906 | 0.913 | 1.114 | 0.000 | 0.060 | 164.050 | 134-3028-9155 |
| 1.142 | 1.142 | 1.358 | 0.000 | 0.087 | 82.025 | 134-3035-9156 |
| 1.457 | 1.417 | 1.669 | 0.000 | 0.114 | 82.025 | 134-3042-9156 |
| 1.969 | 1.878 | 2.126 | 0.000 | 0.155 | 82.025 | 134-3054-9156 |
| two-part, black | | | | | | |
| 0.335 | 0.244 | 0.441 | 2.756 | 0.020 | 164.050 | 134-3011-9151 |
| 0.394 | 0.311 | 0.508 | 2.953 | 0.027 | 164.050 | 134-3013-9151 |
| 0.512 | 0.406 | 0.622 | 3.937 | 0.047 | 164.050 | 134-3016-9151 |
| 0.669 | 0.547 | 0.827 | 4.724 | 0.060 | 164.050 | 134-3021-9151 |
| 0.906 | 0.807 | 1.114 | 6.693 | 0.094 | 164.050 | 134-3028-9151 |
| 1.142 | 1.047 | 1.358 | 7.087 | 0.128 | 82.025 | 134-3035-9152 |
| 1.457 | 1.260 | 1.646 | 7.874 | 0.188 | 82.025 | 134-3042-9152 |
| 1.969 | 1.693 | 2.134 | 9.449 | 0.215 | 82.025 | 134-3054-9152 |
| black | | | | | | |
| 0.335 | 0.331 | 0.461 | 0.591 | 0.013 | 164.050 | 134-3012-9050 |
| 0.394 | 0.390 | 0.512 | 0.787 | 0.020 | 164.050 | 134-3013-9050 |
| 0.512 | 0.500 | 0.622 | 1.378 | 0.027 | 164.050 | 134-3016-9050 |
| 0.669 | 0.654 | 0.835 | 1.772 | 0.040 | 164.050 | 134-3021-9050 |
| 0.906 | 0.913 | 1.114 | 2.165 | 0.060 | 164.050 | 134-3028-9050 |
| 1.142 | 1.142 | 1.358 | 2.559 | 0.087 | 82.025 | 134-3035-9025 |
| 1.457 | 1.417 | 1.669 | 3.543 | 0.114 | 82.025 | 134-3042-9025 |

Positive and negative pressure ratings are the recommended maximum operating values. Products can be manufactured to meet higher operating values upon request. The bend radius is calculated from the center of the hose in an arched position. Additional information at www.norres.com/us/technology/. NORRES reserves the right to modify technical data at any time. Technical data based on tests at 68 °F and are approx. values. Proper use and maintenance of NORRES hoses is the sole responsibility of purchaser and ultimate user of the product. The individual conditions, applications and the number of variables make firm recommendations technically impossible. This information is intended as a general guide only.

NORDUC® PA 134

| Nominal width connecting part (in) | I.D. (mm) | outer Ø (in) | Bending radius (middle of hose) (in) | Weight (lb/ft) | PU (ft) | Order No. |
|---|--------------|-----------------|---|-------------------|------------|---------------|
| 1.969 | 1.878 | 2.126 | 3.937 | 0.155 | 82.025 | 134-3054-9025 |
| gray | | | | | | |
| 0.335 | 0.331 | 0.461 | 0.591 | 0.013 | 164.050 | 134-3012-9150 |
| 0.394 | 0.390 | 0.512 | 0.787 | 0.020 | 164.050 | 134-3013-9150 |
| 0.512 | 0.500 | 0.622 | 1.378 | 0.027 | 164.050 | 134-3016-9150 |
| 0.669 | 0.654 | 0.835 | 1.772 | 0.040 | 164.050 | 134-3021-9150 |
| 0.906 | 0.913 | 1.114 | 2.165 | 0.060 | 164.050 | 134-3028-9150 |
| 1.142 | 1.142 | 1.358 | 2.559 | 0.087 | 82.025 | 134-3035-9125 |
| 1.457 | 1.417 | 1.669 | 3.543 | 0.114 | 82.025 | 134-3042-9125 |
| 1.969 | 1.878 | 2.126 | 3.937 | 0.155 | 82.025 | 134-3054-9125 |

Accessories



GK 169



NORDUC® A 183