



CONNECT 202

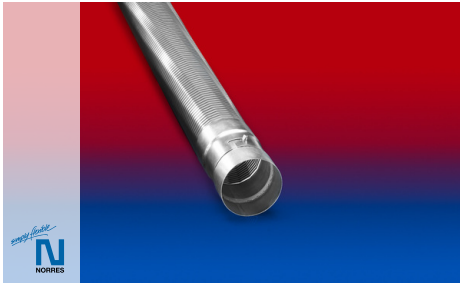

Connectors for connecting or attaching metal hoses

Properties

- conforms to RoHS guideline

- Bayonet lock 202**: cylindrical bayonet lock, alternatively coupling with a pin or flange with an L-slot, extension at one end for attaching the metal hose
- REACH according to --> Technology / Technical Information / REACH

Design

- Stainless Steel (INOX)

Delivery variants

- further diameters available on request

S	A	L	Weight	Suitable for hose I.D.	Order No.
(in)	(mm)	(in)	(lb/pcs)	(in)	

Assembly

202-0000-2905

Bayonet Fitting 202 with Pin Stainless Steel (INOX)

0.039	1.969	3.150	0.243	50	202-0050-2013
0.039	1.969	3.543	0.353	60	202-0060-2013
0.039	1.969	3.543	0.397	70	202-0070-2013
0.039	1.969	3.543	0.441	80	202-0080-2013
0.039	2.362	4.331	0.662	100	202-0100-2013
0.039	2.362	4.331	0.772	120	202-0120-2013
0.039	2.362	4.331	0.816	125	202-0125-2013
0.059	2.756	5.118	1.610	140	202-0140-2013
0.059	2.756	5.118	1.698	150	202-0150-2013
0.059	2.756	5.118	2.007	180	202-0180-2013
0.059	3.543	6.299	2.933	200	202-0200-2013
0.079	3.543	6.299	4.763	250	202-0250-2013
0.079	3.937	7.087	6.328	300	202-0300-2013

Bayonet Fitting 202 with L-Slot Stainless Steel (INOX)

0.039	1.969	3.150	0.243	50	202-0050-2014
0.039	1.969	3.543	0.353	60	202-0060-2014
0.039	1.969	3.543	0.397	70	202-0070-2014
0.039	1.969	3.543	0.441	80	202-0080-2014
0.039	2.362	4.331	0.662	100	202-0100-2014
0.039	2.362	4.331	0.772	120	202-0120-2014
0.039	2.362	4.331	0.816	125	202-0125-2014
0.059	2.756	5.118	1.610	140	202-0140-2014
0.059	2.756	5.118	1.698	150	202-0150-2014
0.059	2.756	5.118	2.007	180	202-0180-2014
0.059	3.543	6.299	2.933	200	202-0200-2014
0.079	3.543	6.299	4.763	250	202-0250-2014
0.079	3.937	7.087	6.328	300	202-0300-2014

Positive and negative pressure ratings are the recommended maximum operating values. Products can be manufactured to meet higher operating values upon request. The bend radius is calculated from the center of the hose in an arched position. Additional information at www.norres.com/us/technology/. NORRES reserves the right to modify technical data at any time. Technical data based on tests at 68 °F and are approx. values. Proper use and maintenance of NORRES hoses is the sole responsibility of purchaser and ultimate user of the product. The individual conditions, applications and the number of variables make firm recommendations technically impossible. This information is intended as a general guide only.