



# CONNECT 203-204

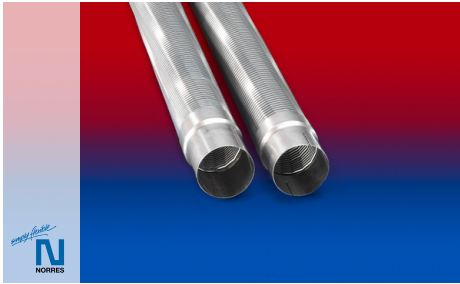

Connectors for connecting or attaching metal hoses

### Properties

- conforms to RoHS guideline

- Adapter 203: cylindrical adapter, extension at one end for attaching the metal hose
- Slotted adapter 204: cylindrical adapter with two slots, extension at one end for attaching the metal hose

### Design

- Stainless Steel (INOX)

### Delivery variants

- further diameters available on request

S	B	T	A	L	Weight	Suitable for Hose I.D.	Order No.
(mm)	(mm)	(mm)	(mm)	(mm)	(kg/pcs)	(mm)	

#### Assembly; (please select the hose separately); rivetting

-	-	-	-	-	-	-	203-0000-2905
-	-	-	-	-	-	-	204-0000-2905

#### Connector 203 stainless steel (INOX)

1	2	30	50	80	0,090	40	203-0040-1100
1	2	40	70	100	0,130	50	203-0050-1100
1	2	40	70	110	0,180	60	203-0060-1100
1	2	40	80	120	0,220	70	203-0070-1100
1	2	40	80	120	0,250	80	203-0080-1100
1	3	50	100	150	0,390	100	203-0100-1100
1	3	50	100	150	0,460	120	203-0120-1100
1	3	50	100	150	0,480	125	203-0125-1100
1,25	3	55	100	160	0,770	150	203-0150-1100
1,25	3	60	120	180	1,030	180	203-0180-1100
1,25	3	70	140	210	1,330	200	203-0200-1100
1,25	3	80	180	250	1,970	250	203-0250-1100
1,5	3	80	200	280	3,180	300	203-0300-1100

#### Slotted Adapter 204 stainless steel (INOX)

1	2	30	50	80	0,090	40	204-0040-1100
1	2	40	70	100	0,130	50	204-0050-1100
1	2	40	70	110	0,180	60	204-0060-1100
1	2	40	80	120	0,220	70	204-0070-1100
1	2	40	80	100	0,250	80	204-0080-1100
1	3	50	100	150	0,390	100	204-0100-1100
1	3	50	100	150	0,460	120	204-0120-1100
1	3	50	100	150	0,480	125	204-0125-1100
1,25	3	55	100	160	0,770	150	204-0150-1100
1,25	3	60	120	180	1,030	180	204-0180-1100
1,25	3	70	140	210	1,330	200	204-0200-1100
1,25	3	80	180	250	1,970	250	204-0250-1100

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20°C and are approx. data. Additional information at [www.norres.com/en/technology/](http://www.norres.com/en/technology/).

## CONNECT 203-204

S	B	T	A	L	Weight	Suitable for Hose I.D.	Order No.
(mm)	(mm)	(mm)	(mm)	(mm)	(kg/pcs)	(mm)	
1,5	3	80	200	280	3,180	300	204-0300-1100

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20°C and are approx. data. Additional information at [www.norres.com/en/technology/](http://www.norres.com/en/technology/).