



# CONNECT 203-204

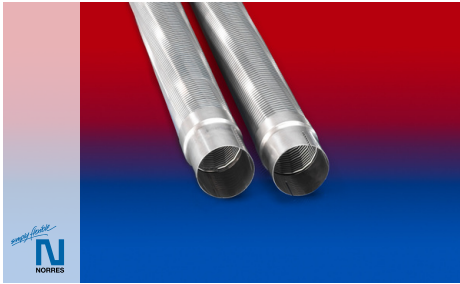

Connectors for connecting or attaching metal hoses

### Properties

- conforms to RoHS guideline

- Connect 203**: cylindrical adapter, extension at one end for attaching the metal hose
- Slotted Connect 204**: cylindrical adapter with two slots, extension at one end for attaching the metal hose

### Design

- Stainless Steel (INOX)

### Delivery variants

- further diameters available on request

S	B	T	A	L	Weight	Suitable for hose I.D.	Order No.
(in)	(in)	(in)	(mm)	(in)	(lb/pcs)	(in)	

#### Assembly; (please select the hose separately); riveting

-	-	-	-	-	-	-	203-0000-2905
-	-	-	-	-	-	-	204-0000-2905

#### Connect 203 stainless steel (INOX)

0.039	0.079	1.181	1.969	3.150	0.198	40	203-0040-1100
0.039	0.079	1.575	2.756	3.937	0.287	50	203-0050-1100
0.039	0.079	1.575	2.756	4.331	0.397	60	203-0060-1100
0.039	0.079	1.575	3.150	4.724	0.485	70	203-0070-1100
0.039	0.079	1.575	3.150	4.724	0.551	80	203-0080-1100
0.039	0.118	1.969	3.937	5.906	0.860	100	203-0100-1100
0.039	0.118	1.969	3.937	5.906	1.014	120	203-0120-1100
0.039	0.118	1.969	3.937	5.906	1.058	125	203-0125-1100
0.049	0.118	2.165	3.937	6.299	1.698	150	203-0150-1100
0.049	0.118	2.362	4.724	7.087	2.271	180	203-0180-1100
0.049	0.118	2.756	5.512	8.268	2.933	200	203-0200-1100
0.049	0.118	3.150	7.087	9.843	4.344	250	203-0250-1100
0.059	0.118	3.150	7.874	11.024	7.012	300	203-0300-1100

#### Slotted adapter 204 stainless steel (INOX)

0.039	0.079	1.181	1.969	3.150	0.198	40	204-0040-1100
0.039	0.079	1.575	2.756	3.937	0.287	50	204-0050-1100
0.039	0.079	1.575	2.756	4.331	0.397	60	204-0060-1100
0.039	0.079	1.575	3.150	4.724	0.485	70	204-0070-1100
0.039	0.079	1.575	3.150	3.937	0.551	80	204-0080-1100
0.039	0.118	1.969	3.937	5.906	0.860	100	204-0100-1100
0.039	0.118	1.969	3.937	5.906	1.014	120	204-0120-1100
0.039	0.118	1.969	3.937	5.906	1.058	125	204-0125-1100
0.049	0.118	2.165	3.937	6.299	1.698	150	204-0150-1100
0.049	0.118	2.362	4.724	7.087	2.271	180	204-0180-1100
0.049	0.118	2.756	5.512	8.268	2.933	200	204-0200-1100
0.049	0.118	3.150	7.087	9.843	4.344	250	204-0250-1100

Positive and negative pressure ratings are the recommended maximum operating values. Products can be manufactured to meet higher operating values upon request. The bend radius is calculated from the center of the hose in an arched position. Additional information at [www.norres.com/us/technology/](http://www.norres.com/us/technology/). NORRES reserves the right to modify technical data at any time. Technical data based on tests at 68 °F and are approx. values. Proper use and maintenance of NORRES hoses is the sole responsibility of purchaser and ultimate user of the product. The individual conditions, applications and the number of variables make firm recommendations technically impossible. This information is intended as a general guide only.

# CONNECT 203-204

S	B	T	A	L	Weight	Suitable for hose I.D.	Order No.
(in)	(in)	(in)	(mm)	(in)	(lb/pcs)	(in)	
0.059	0.118	3.150	7.874	11.024	7.012	300	204-0300-1100

Positive and negative pressure ratings are the recommended maximum operating values. Products can be manufactured to meet higher operating values upon request. The bend radius is calculated from the center of the hose in an arched position. Additional information at [www.norres.com/us/technology/](http://www.norres.com/us/technology/). NORRES reserves the right to modify technical data at any time. Technical data based on tests at 68 °F and are approx. values. Proper use and maintenance of NORRES hoses is the sole responsibility of purchaser and ultimate user of the product. The individual conditions, applications and the number of variables make firm recommendations technically impossible. This information is intended as a general guide only.