



CONNECT 205

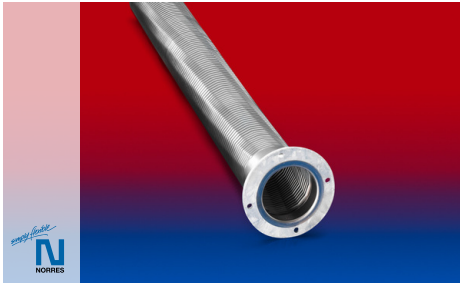

Connectors for connecting or attaching metal hoses

Properties

- conforms to RoHS guideline

- Flange 205**: cylindrical adapter with rotatable flange, extension at one end for attaching the metal hose
- REACH according to --> Technology / Technical Information / REACH

Design

- Stainless Steel (INOX)

Delivery variants

- further diameters available on request

| No. and Ø fixing holes | S | B | K | D1 | A | L | Weight | Suitable for hose I.D. | Order No. |
|------------------------|------|------|------|------|------|------|----------|------------------------|-----------|
| (inch) | (in) | (in) | (in) | (in) | (mm) | (in) | (lb/pcs) | (in) | |

Assembly; (please select the hose separately); riveting

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---------------|
| - | - | - | - | - | - | - | - | - | 205-0000-2905 |
|---|---|---|---|---|---|---|---|---|---------------|

Flange 205 Stainless Steel (INOX)

| | | | | | | | | | |
|-------|-------|-------|--------|--------|-------|-------|-------|-----|---------------|
| 0.157 | 0.039 | 0.236 | 3.504 | 4.528 | 1.575 | 2.756 | 1.058 | 50 | 205-0050-1100 |
| 0.157 | 0.039 | 0.236 | 3.898 | 4.921 | 1.575 | 3.150 | 1.213 | 60 | 205-0060-1100 |
| 0.157 | 0.039 | 0.236 | 4.331 | 5.236 | 1.575 | 3.150 | 1.345 | 70 | 205-0070-1100 |
| 0.157 | 0.039 | 0.236 | 4.646 | 5.591 | 1.575 | 3.150 | 1.477 | 80 | 205-0080-1100 |
| 0.157 | 0.039 | 0.236 | 5.472 | 6.378 | 1.969 | 3.937 | 1.918 | 100 | 205-0100-1100 |
| 0.157 | 0.039 | 0.236 | 6.496 | 7.362 | 1.969 | 3.937 | 2.271 | 120 | 205-0120-1100 |
| 0.157 | 0.039 | 0.236 | 6.496 | 7.362 | 1.969 | 3.937 | 2.293 | 125 | 205-0125-1100 |
| 0.315 | 0.039 | 0.236 | 7.165 | 8.346 | 2.362 | 4.724 | 2.955 | 140 | 205-0140-1100 |
| 0.315 | 0.049 | 0.236 | 8.622 | 9.921 | 2.362 | 4.724 | 4.035 | 180 | 205-0180-1100 |
| 0.315 | 0.049 | 0.236 | 9.488 | 10.748 | 2.362 | 5.118 | 4.631 | 200 | 205-0200-1100 |
| 0.315 | 0.049 | 0.236 | 11.496 | 12.717 | 2.362 | 5.118 | 5.689 | 250 | 205-0250-1100 |
| 0.315 | 0.059 | 0.236 | 13.740 | 15.079 | 2.362 | 5.512 | 9.878 | 300 | 205-0300-1100 |

Positive and negative pressure ratings are the recommended maximum operating values. Products can be manufactured to meet higher operating values upon request. The bend radius is calculated from the center of the hose in an arched position. Additional information at www.norres.com/us/technology/. NORRES reserves the right to modify technical data at any time. Technical data based on tests at 68 °F and are approx. values. Proper use and maintenance of NORRES hoses is the sole responsibility of purchaser and ultimate user of the product. The individual conditions, applications and the number of variables make firm recommendations technically impossible. This information is intended as a general guide only.